





TRYGG

Preferred for a reason

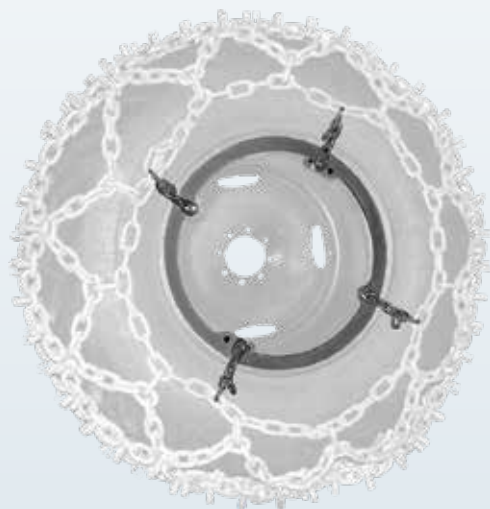

Rim ring

Mounting instruction

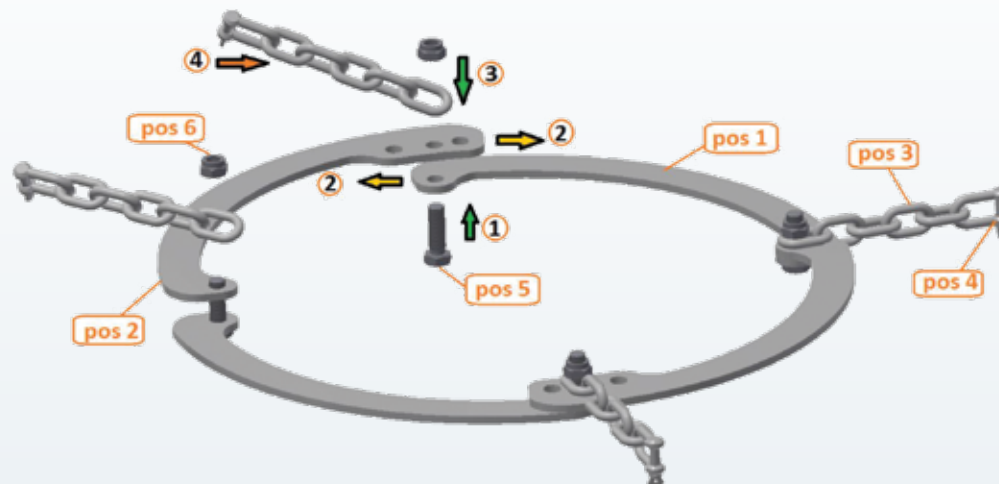

1

Festebolter (pos 5).

Insert bolt (pos 5).

2

Velg feste-hull (pos 1 og 2) for korrekt omkrets.

Adjust arc (pos 1 & pos 2) holes according to your rim dimensions.

3

Fest enden på de medfølgende kjetting-lengdene (pos 3) til hver bolt (pos 5) og skru til mutrene (pos 6).

Place chain (pos 3) on bolt (pos 5) & fasten by nut (pos 6).

4

Fest sjaklene (pos 4) i andre enden av kjetting lengdene (pos 3).

Put shackle (pos 4) on the end of chain (pos 3).



WARNING!

IMPROPER USE CAN RESULT IN DEATH OR SERIOUS INJURY

*ONLY use these chains as tire chains.
NEVER use for towing, lifting, securing,
or lashing.*

*DO NOT exceed 30 mph (50 km/h).
Chains can break under tension
causing hazardous projectiles and
loss of vehicle control.*

*DO NOT operate with worn, damaged,
or improperly installed chains.*

*DO NOT use tire chains on dry pavement
or under conditions where snow or ice
is not present, as this may cause tire
damage or loss of control.*

*ALWAYS read and follow full safety
instructions provided in the QR-code
link. Place chain (pos 3) on bolt (pos 5)
& fasten by nut (pos 6).*

Thank you for choosing TRYGG!

*TRYGG (Norwegian for “safe”) is a name
that commits. Since 1939, we’ve pushed
product development and innovation to
deliver the safest and most user-friendly
products.*

*Our sourcing and production methods
ensure some of the world’s most envi-
ronmentally friendly chains.*

*We hope you enjoy your new TRYGG tire
chains!*

Preferred for a reason

Information
regarding use,
safety and warranty:



User manuals
in more languages:



www.trygg.no

www.nosted.com