

NORSE 250

QR Code

SKU: ' productVariants.sku '

Max pulling capacity / empty drum: 25 kN, 5 600 lbf, (2,5tons)

Max pulling capacity / full drum: 10 kN, 2 240 lbf, (1 tonn)

Number of drums: 1

Wire rope, theoretical capacity: 203 ft x 5/16 in

Recommended wire rope length: 164 ft x 5/16 in

Pulling speed at 540 rpm: 2,2 – 5,12 ft/s

Ratio: 1 : 4,72

Necessary power input: 15 kW

Braking power: 23,75 kN, 5 339 lbf

Controls: Standard cord operation

Clutch: Replaceable friction pads


Brake: Ratchet brake

Mounting: 3-point hitch

PTO input, distance from ground: 12,2 inches, (31 cm)

Height/ Width/ Depth : 50,8 / 36,2 / 18,1 po. (129 / 92 / 46 cm)

Weight (without wire rope): 282 lb, (128 kg)

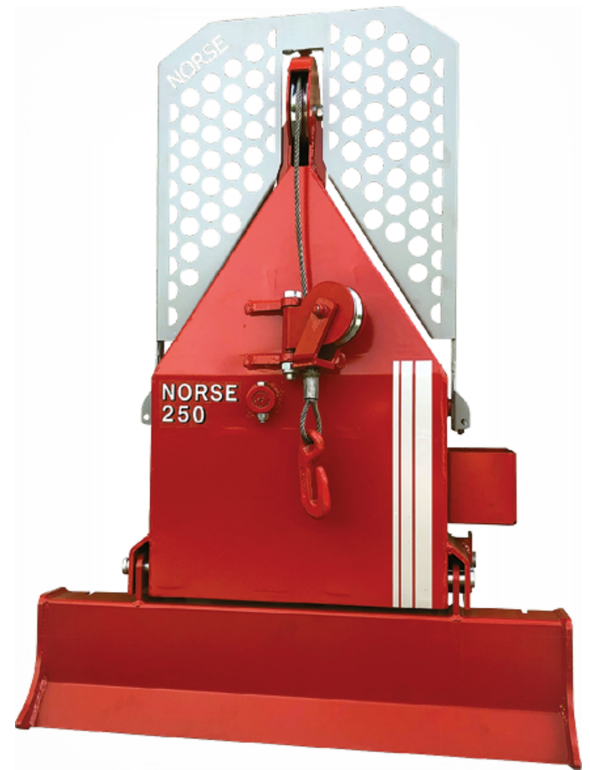

NORSE 250

The smallest Norse winch 250. Fits 15-35 hp tractors with standard 3-point clutch. Max. traction is 2.5 tons. The winch and the brake are operated by a rope system, either from a tractor or at a safe distance. The winch has an articulated tray that "transports" the logs over obstacles on the ground.